

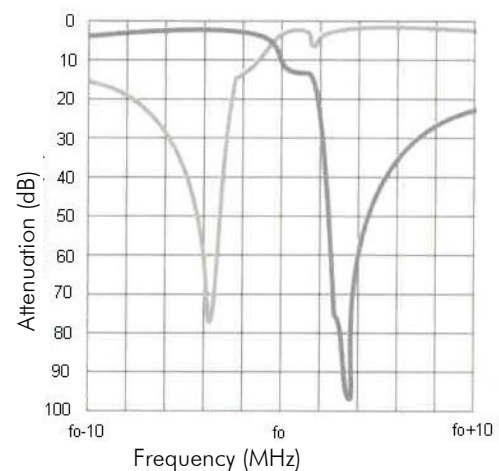
BAND REJECT DUPLEXERS

- ☑ The DM 66/6 is a 6 resonator duplex filter designed to combine both receive and transmit frequencies into a single antenna.
- ☑ The DM 66/6 can be tuned within the 66 to 88 MHz range with a spacing of 3 to 7 MHz
- ☑ The duplexer is compact and thereby minimizes space requirements.


DM66-6

D10AA0030A

Electrical Data	DM66-6	
Frequency	66—88	MHz
Frequency Spacing	3—7 min.	MHz
Input Power	40 (continuous)	W
Insertion Loss	Tx—Ant: ≤ 1,2 (max)	dB
Rx Isolation	@ Tx Freq.: ≥ 80 (typ.)	dB
VSWR (max)	≤ 1,3 : 1	
Impedance	50	Ω
Termination	BNC female	
Mechanical Data		
Temperature Range	- 10 ... + 60	°C
Dimensions	H 0,033 x W 0,158 x D 0,144	m
Packed Weight	0,8	kg
Packed Dimensions	24 x 18 x 4,5	cm


TYPICAL RESPONSE CURVES