

# 200W Dummy Load, DIN Male, Low PIM

LD-200DM,LIM



## Electrical



Frequency Range - [GHz]	0.8~ 3
Impedance - [ $\Omega$ ]	50
Average Power - [W]	200@25°C
VSWR, Max	1.25
3 <sup>rd</sup> Order Inter-modulation (PIM3) - [dBc] (@935MHz & 960MHz with 2x43dBm Carriers)	-150

## Mechanical & Environmental

Dimension* - [mm]	257×80×220
Weight - [g]	1800
Connector Type	DIN Male
Temperature Range - [°C]	-40 ~ +80

## Order Information

Model Number	ERP Code	Remark
LD-200DM,LIM	200310-000101-41	DIN Male

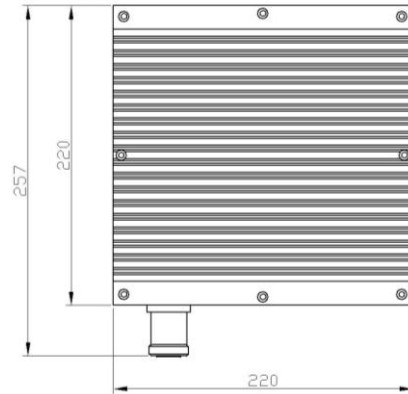

\* Note: Dimension Tolerance is  $\pm 5\%$ .