


# LOAD TERMINATIONS

- ☑ This 50 W Coaxial Load Resistor provides a stable 50 Ohm termination and an extremely low VSWR required by circulators and hybrids.
- ☑ It is designed to absorb reflected power when used in conjunction with isolators.
- ☑ It can also be used to terminate unused ports in combiner systems.

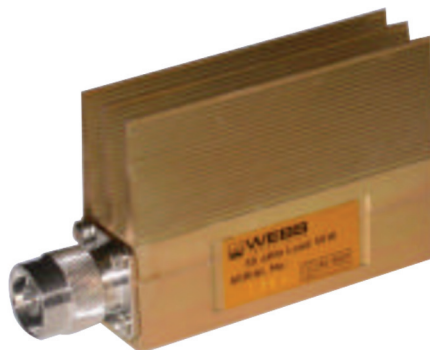

**ALE050**

D10AA0080A

Electrical Data	ALE050
Frequency	DC—3000 MHz
Power Rating	40 W @ 40°C, 50 W @ 25°C
VSWR (max)	1,15 : 1 (max)
Impedance	50 Ohm
Termination Type	N male
Mechanical Data	
Temperature Range	-40 to 40°C
Coolant	Dry (Convectional Cooling)
Length	115 mm
Width	30 mm
Height	65 mm
Packed Weight	0,28 kg