



webb
industries

400 ... 470 MHz

ELITE MOBILE ANTENNAS

- ☑ The ELITE400 and ELITE450 are mobile collinear antennas designed for mounting from the inside or outside of the vehicle body.
- ☑ Antennas supplied with 4 m RG-58 coaxial cable as standard other lengths available on request.

ELECTRICAL DATA		ELITE400	ELITE450
Frequency (MHz)		400 – 440	440 – 470
Nominal Gain		4 dB	
Bandwidth	VSWR	10 MHz	
< 1,5:1			
VSWR		< 1,5:1	
Radiation Pattern		Omni-directional	
Polarisation		Vertical	
Rated Power		50 W	
Impedance		50 Ω	
Termination		4 m RG-58, no connector	

MECHANICAL DATA	
Max. wind velocity	220 km/h
Whip	17 – 7PH SS with tuning disk
Mounting Hole Size	12 mm
Adjustment	30° Bendable center pin
Colour	Black
Dims	700 mm 640 mm
Packed Dims	0.4 kg / 66 x 11 x 5 cm

REPLACEMENT PARTS




EBC

base & cable
complete.



EW400

EW450

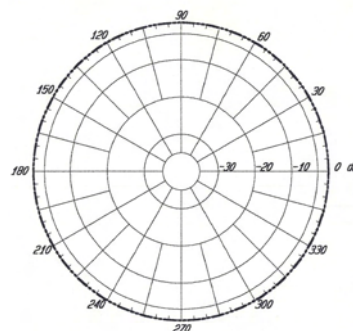

Horizontal Pattern

elite

ISO 9001
CERTIFIED

© 2013/07/31 SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

Website: www.webb.co.za Tel: +27 11 719-0000
e-mail: webb@webb.co.za Fax: +27 11 444-2288

JASCO
INSPIRE. INNOVATE.